


Cut panels accurately.

After cutting main panels (ie 2 aft hull sides, aft bottom) to avoid mistakes mark out the other panels and Bhds but do not cut any until all have are marked

Foredeck, aft buoyancy and seat tops are cut out after hull assembly

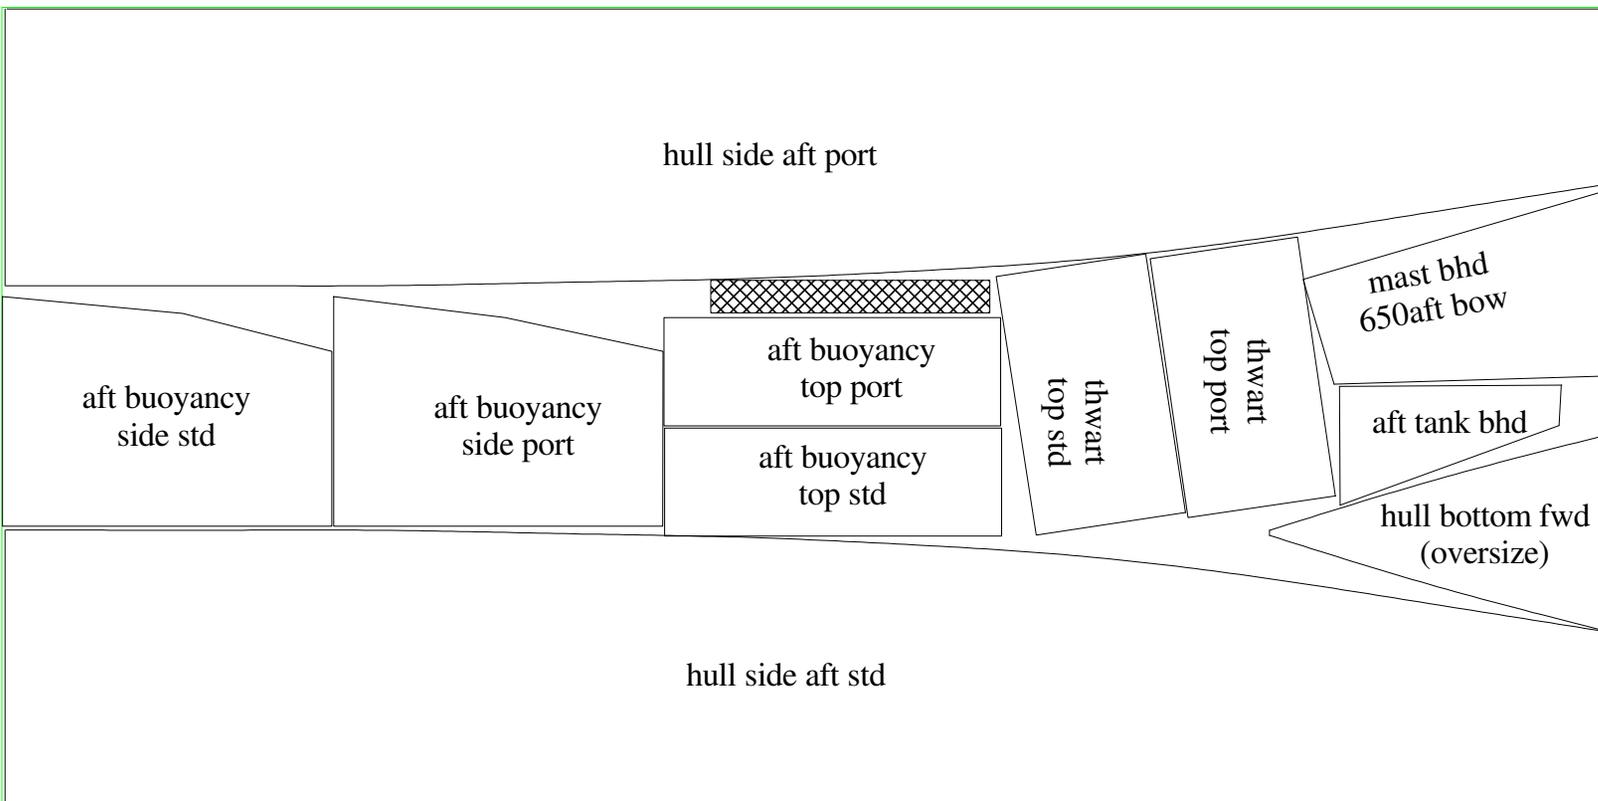

All panels for the rowing version can be cut from 2 sheets of 8ft x 4ft 4mm (3/16in) plywood. The sailing version needs another sheet to make wings, rudder and daggerboard.

Hatched areas are butt straps