



Notes:

1. All cabling from Shore Socket/Generator to DB to be 4mm silicon tinned Cabtyre
2. All cabling from DB to equipment to 2.5 mm Silicon tinned cabtyre
3. Cabtyre to be orange to clearly identify AC runs
4. All cables to be identified with numbers as indicated on drawing, only live indicated
5. For through bulkhead penetrations refer to relevant drawing for detail
6. Cable lengths to be determined by contractor

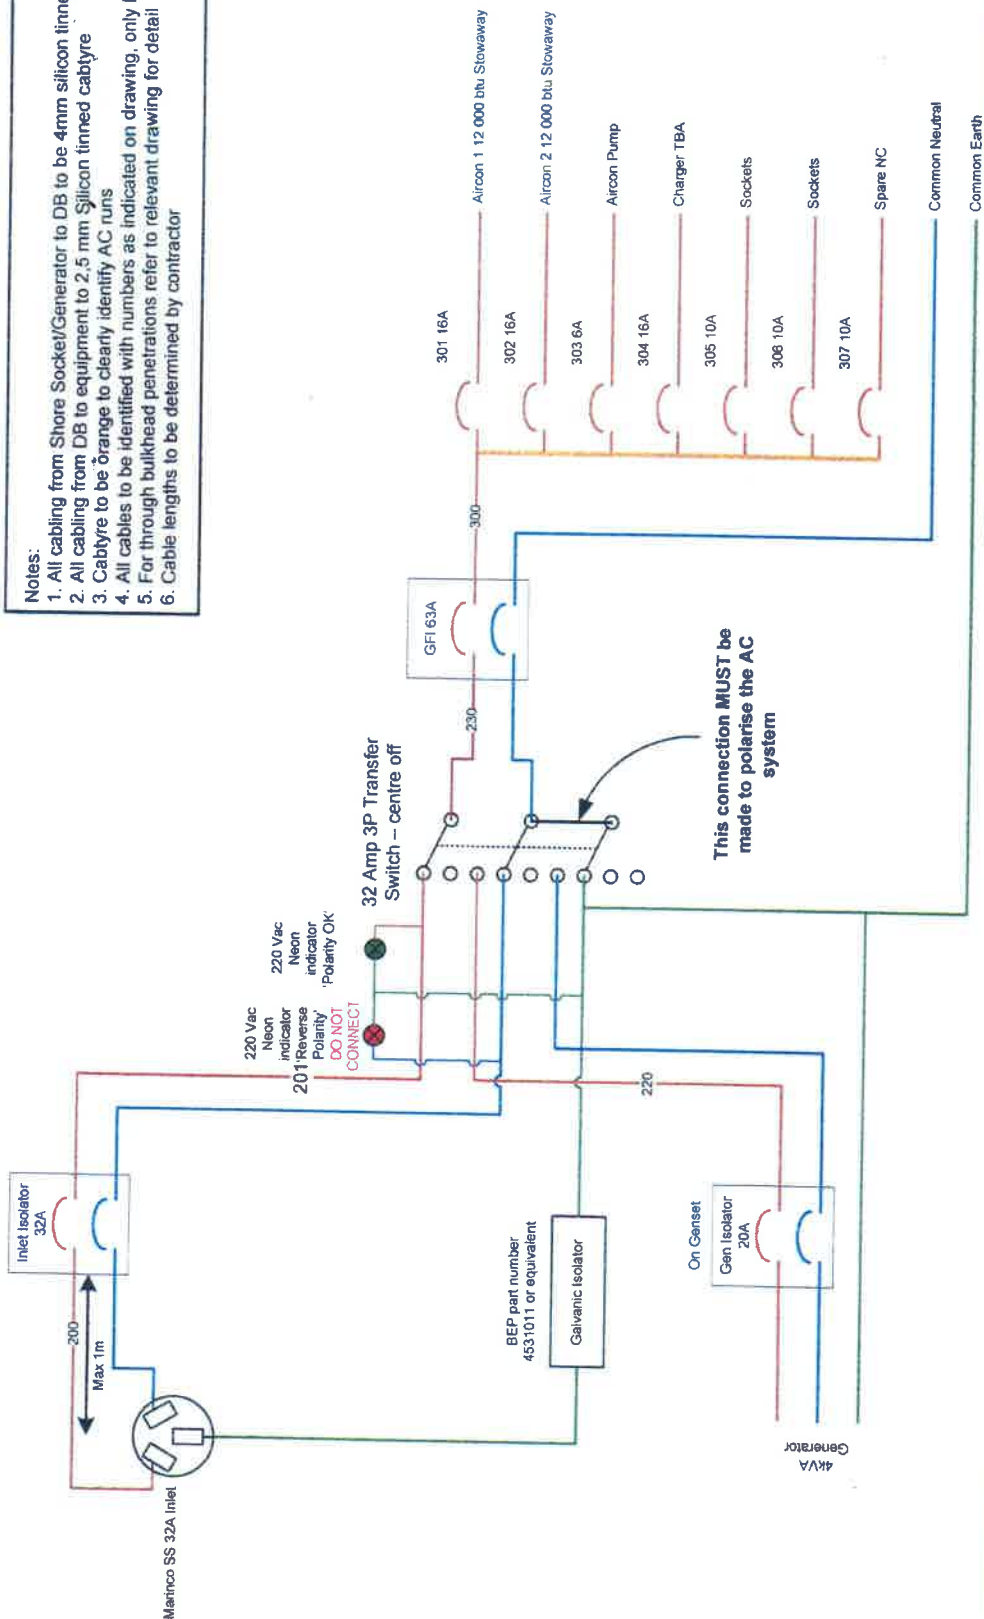

This connection MUST be made to polarise the AC system



TITLE: AC SYSTEM	CREATOR: AC SYSTEM	DRAWING: AC SYSTEM	PRINTED: AC SYSTEM	REVISION: AC SYSTEM
PAGE: 1 OF 3	CREATOR: AC SYSTEM	DRAWING: AC SYSTEM	PRINTED: AC SYSTEM	REVISION: AC SYSTEM
PAGE: 1 OF 3	CREATOR: AC SYSTEM	DRAWING: AC SYSTEM	PRINTED: AC SYSTEM	REVISION: AC SYSTEM
PAGE: 1 OF 3	CREATOR: AC SYSTEM	DRAWING: AC SYSTEM	PRINTED: AC SYSTEM	REVISION: AC SYSTEM
PAGE: 1 OF 3	CREATOR: AC SYSTEM	DRAWING: AC SYSTEM	PRINTED: AC SYSTEM	REVISION: AC SYSTEM