
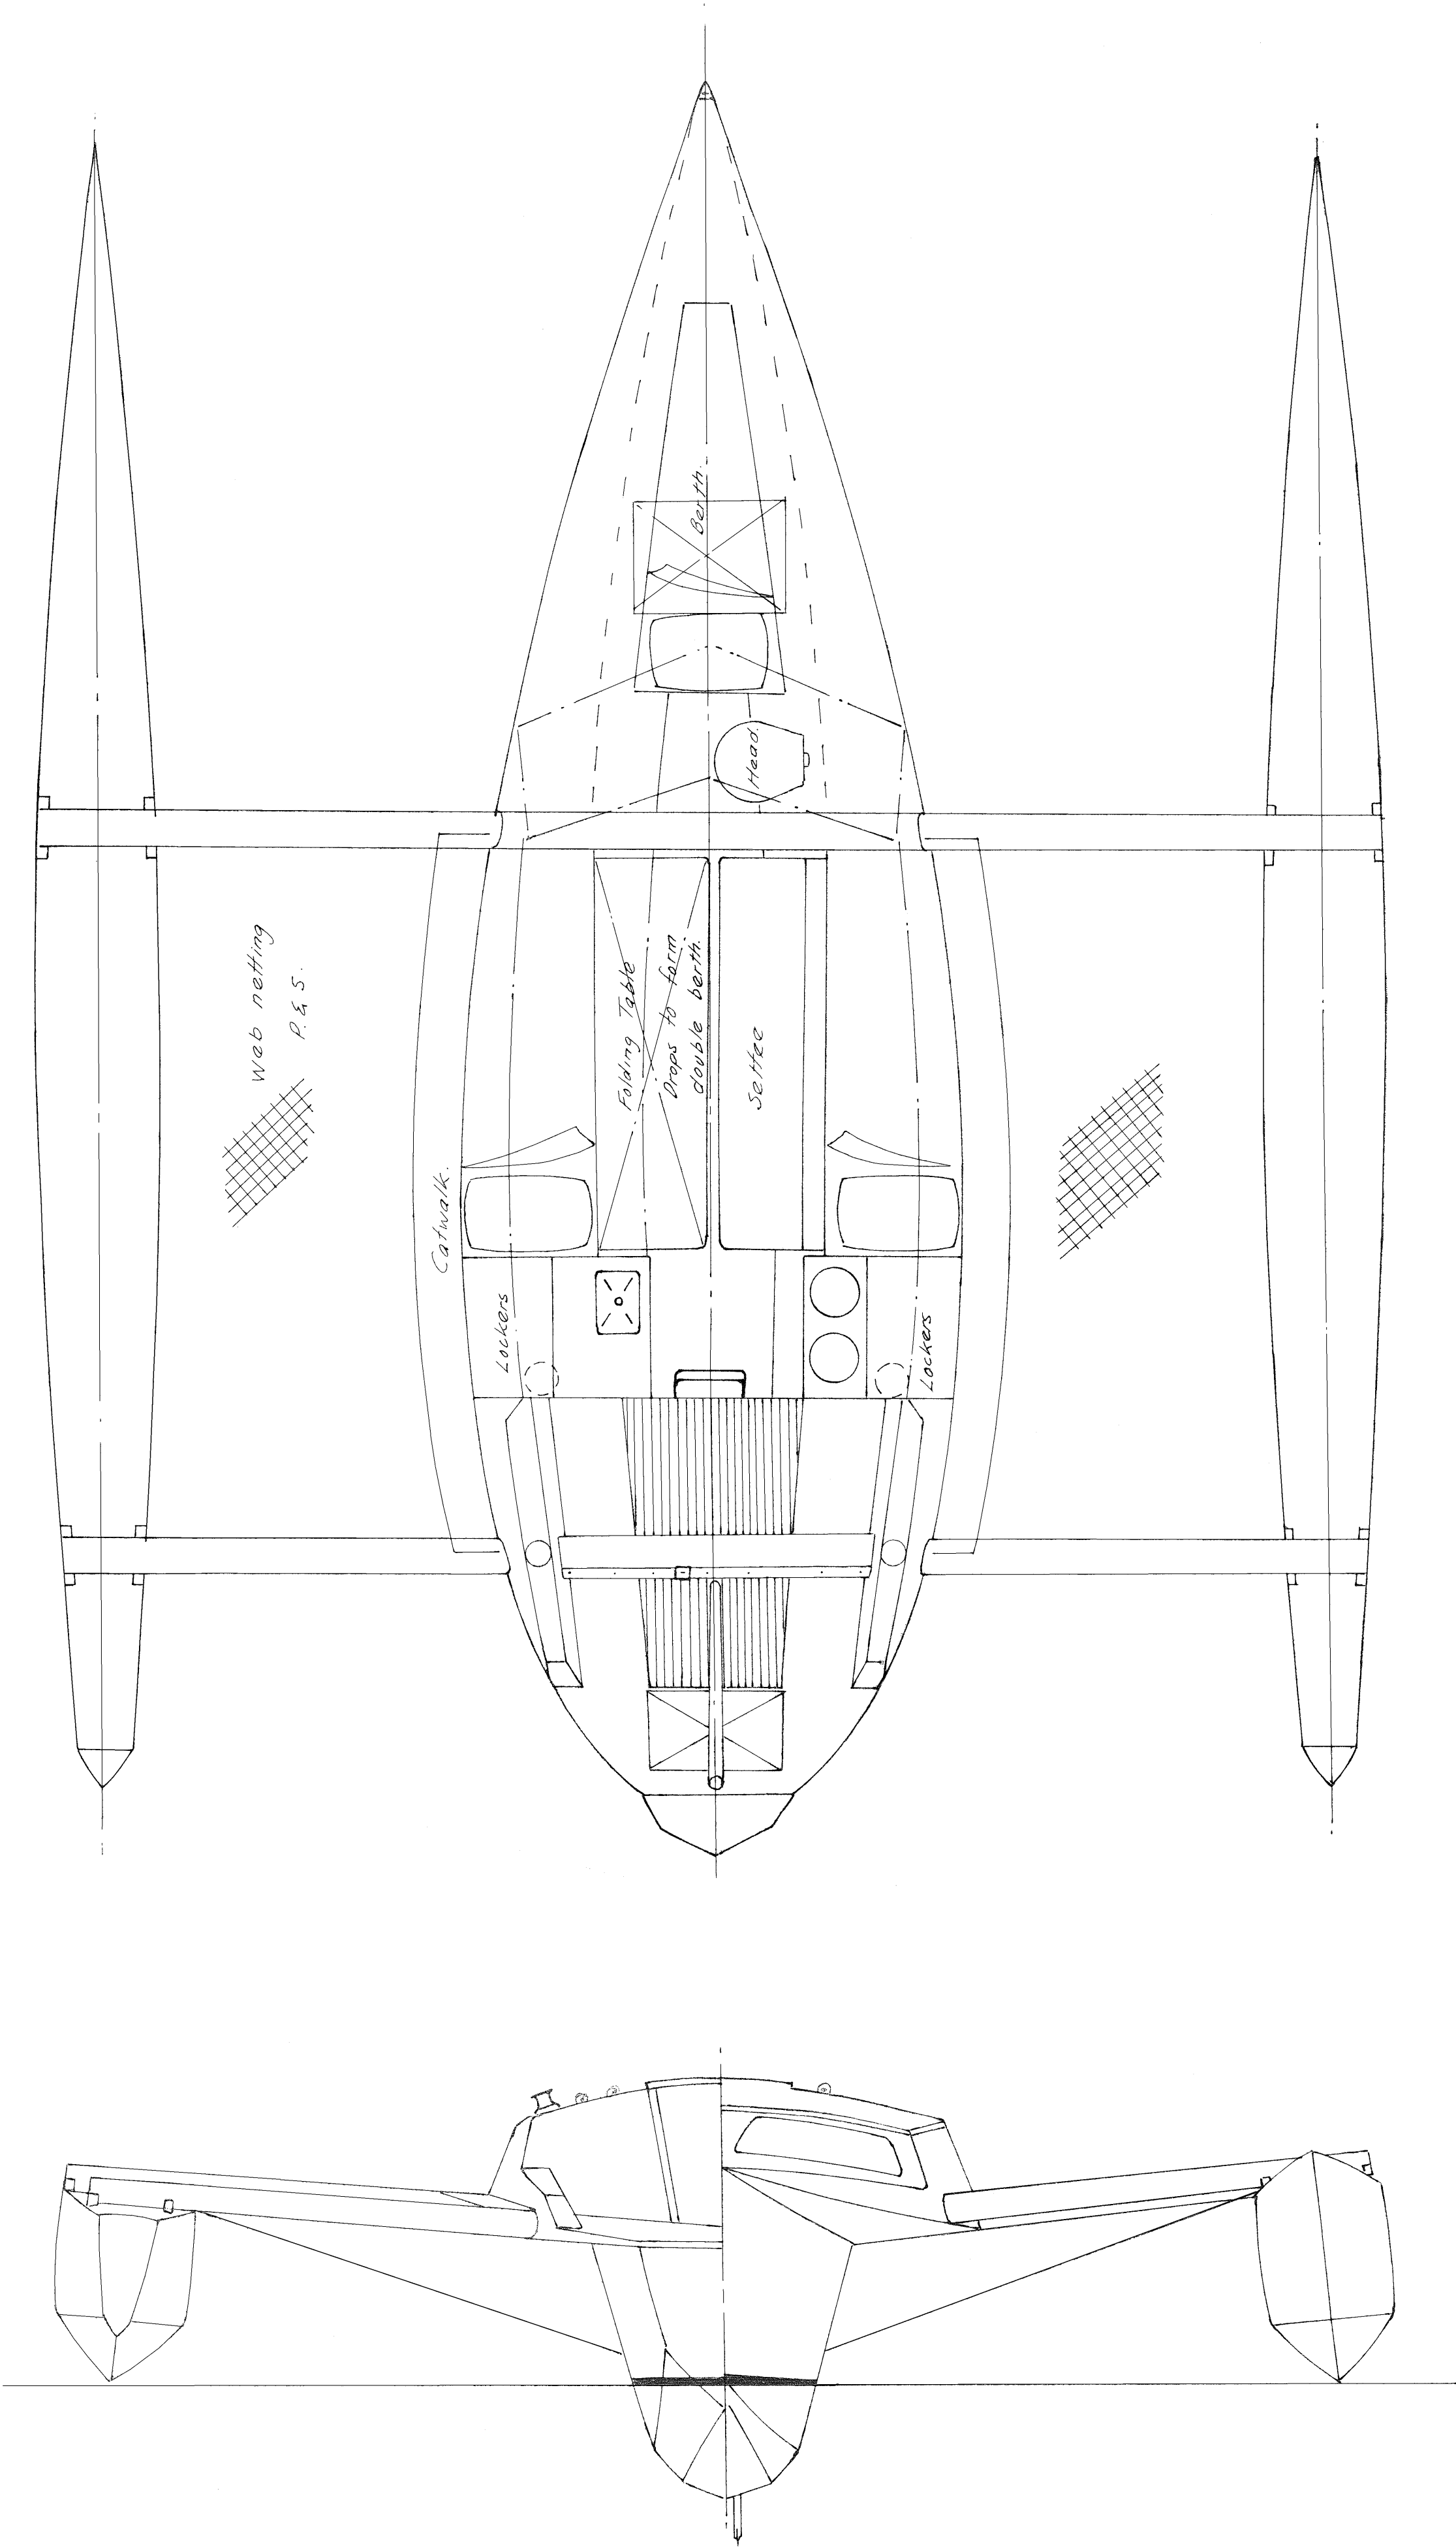


SAILS — DIMENSIONS.

| Sail | Area Sq. Ft. | Cloth Wt ozs/sq. yd. | Luff | Foot | Leech | Roach | Cloth Wt U.S. ozs/yd × 28.5" |
|--------|-----------------|-------------------------|--------|--------|--------|-------|---------------------------------|
| Main | 275 | 10 | 33'-6" | 12'-9" | 35'-0" | 2'-7" | 8 |
| #1 Jib | 335 | 7 | 37'-3" | 19'-3" | 34'-9" | — | 5.5 |
| #2 Jib | 184 | 10 | 29'-6" | 14'-8" | 25'-3" | -2" | 8 |
| #3 Jib | 72 | 10 | 18'-0" | 10'-3" | 14'-4" | -2" | 8 |
| Spin. | 1000 | 1 1/2 | 39'-0" | 26'-0" | 39'-0" | | 12 |

Specification.

L.O.A. 28'-3" Displacement 4000 lbs.
L.W.L. 26'-9" Max. Payload 2000 lbs.
Beam 21'-6" Draft - hull only 1'-9"
Sail Area 610 sq. ft. - rudder 2'-6"
Spin 1000 sq. ft. - centre board 4'-9"
Mast height 36'-0" above step.
Auxiliary 9 HP. longshaft outboard - transom mounted
Construction - Chine/Sheet ply - hulls 1/4"
- decks 3/8"
Crossarms. Aluminium Oval Section - Breaks at Cabin
Stainless Steel Braces. side for demounting

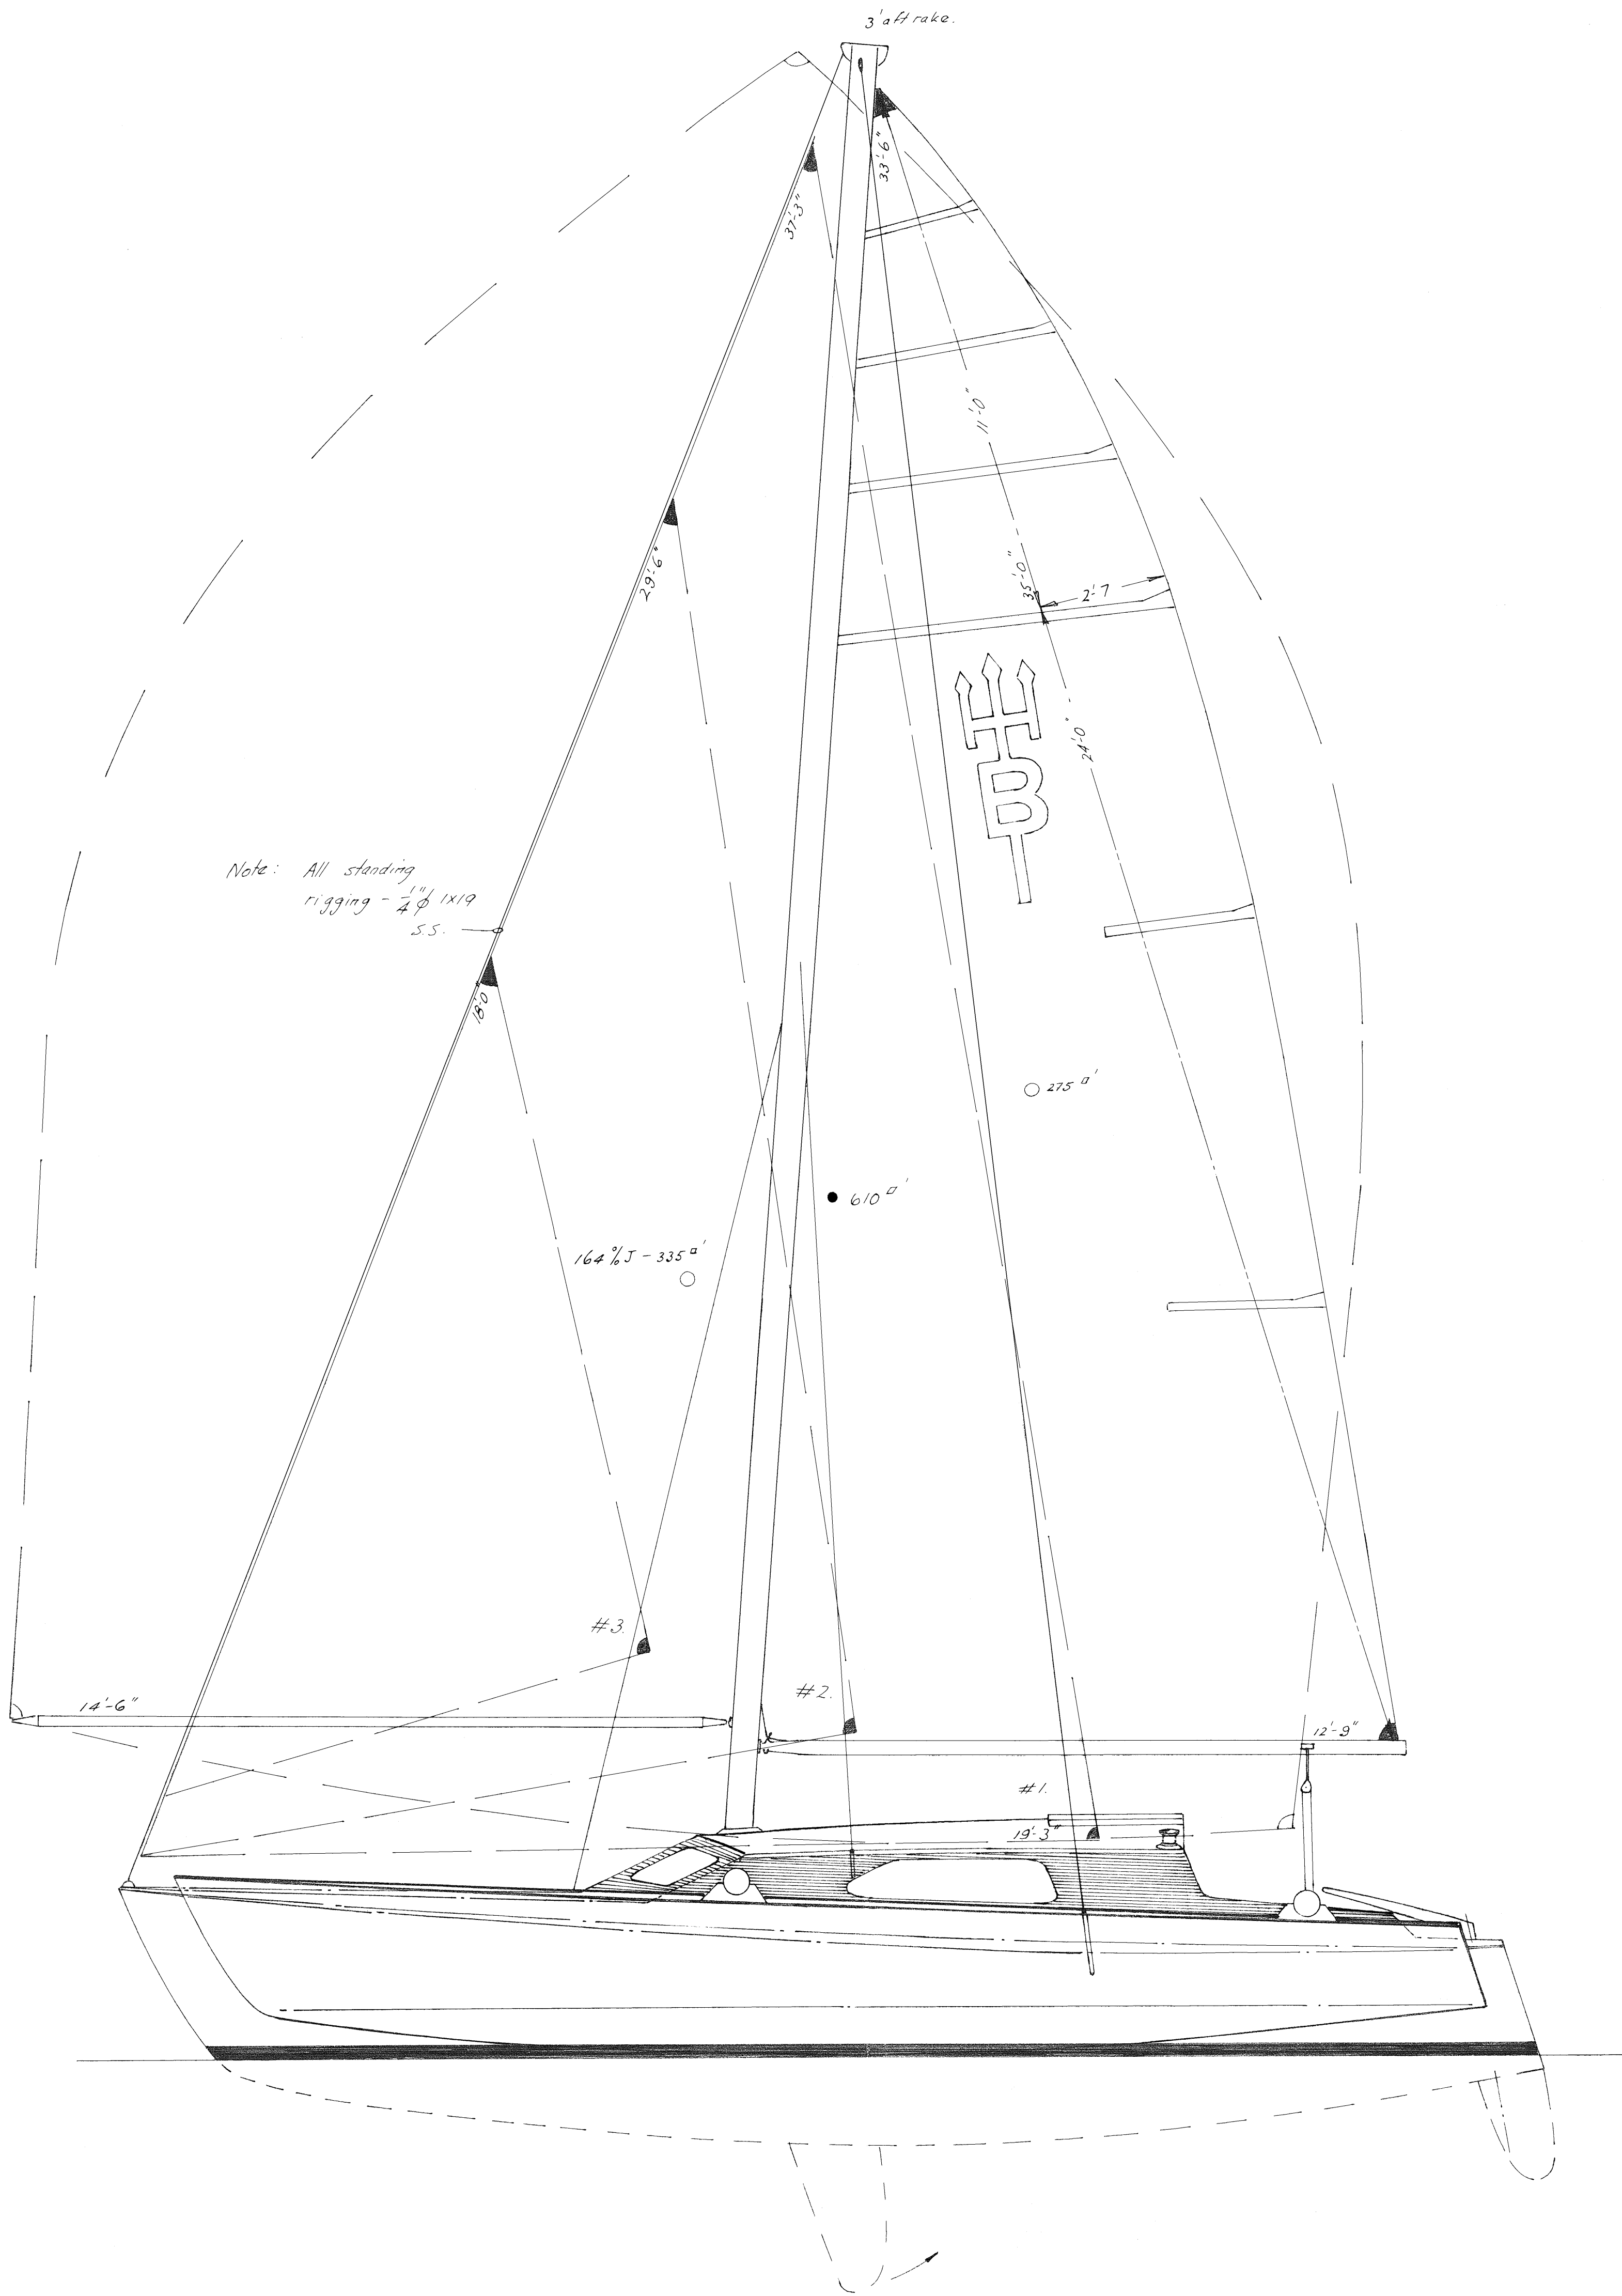

BUCCANEER 28

design by lock crowther.

Scale 1/2" = 1'-0"

sheet 7.