


Specifications

Nominal Voltage		12V
Rated Capacity(10 hour rate)		65AH
Dimensions ±1mm	Length	350mm(13.77")
	Width	167mm(6.57")
	Height	178mm(7.01")
Weight		Approx.26kg
Standard Terminal		B2-M6 bolt & nut

Dimensions(mm)

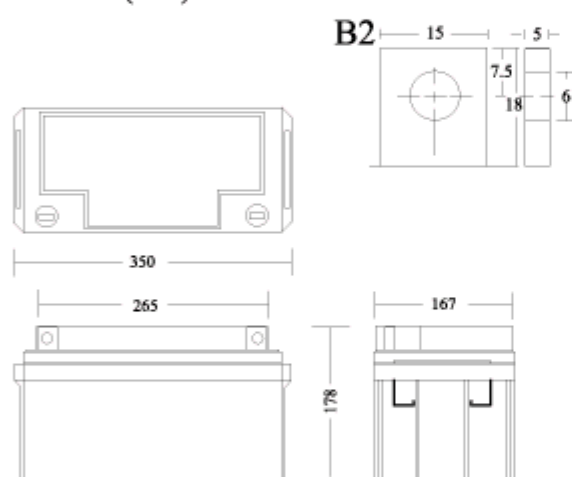

Electrical Specifications

Capacity 77°F(25°C)	20 hour rate (3.53A)	70.5AH
	10 hour rate (6.5A)	65AH
	5 hour rate (11.7A)	58.5AH
	1 hour rate (42.5A)	42.5AH
Internal Resistance	Fully charged battery 77°F(25°C)	6.5mΩ
Capacity affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Charge Constant Voltage	Cycle :Initial Charging Current less than 19.5A Voltage 14.4V-15.0V at 77°F(25°C) Standby:Voltage 13.5V-13.8V at 77°F(25°C)	

